

TECHNICAL DATA SHEET

NUMIX FADE OUT THINNER

PRODUCT DESCRIPTION

Numix Fade out Thinner is a clear transparent blending additive thinner that contains acrylic resin and special blend of solvent to allow easier application

FEATURES


- Specially developed to allow a smooth and invisible spot repair.
- Merge new or old painted surfaces.

APPLICATION DETAILS: (Numix Fade out Thinner)

- As a clear foundation coat for fade out areas.

FADE OUT THINNER METHOD FOR 2K TOPIC OATS:

- Apply 1 coat of 2K topcoat over the spot.
- Apply a 2nd coat of 2K topcoat, extending further into the area surrounding the spot.
- Smoothen out the fade-out area with Numix Fade Out Thinner within 5 min maximum. Mix with balance 2K top. 2K top coat 10% Numix Fade Out Thinner 90%
- Optionally extend the fade-out area within 5 min maximum.
- Stay with the application within the prepared area.

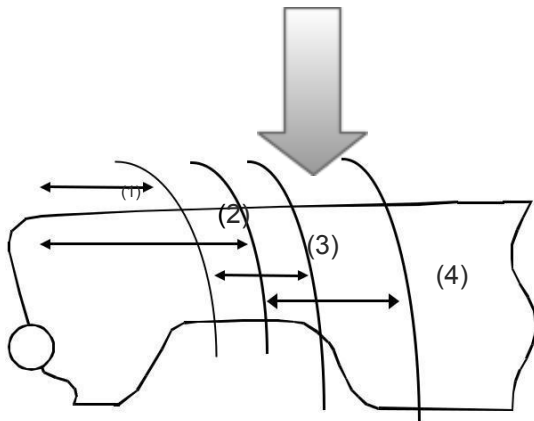


If necessary, balance out the gloss level by polishing with a non silicone containing polishing compound or a non silicone containing final glaze, after complete hardening of the repair.

TECHNICAL DATA SHEET

FADE OUT THINNER METHOD FOR 2K CLEARCOATS:

- Apply 1 coat of 2K clear coat over the basecoat, extending into the area surrounding the spot.
- Apply a 2nd coat of 2K clear coat, extending further into the area surrounding the spot.
- Smoothen out the fade-out area with Numix Fade Out Thinner within 5 min maximum. Mix with balance clear coat 10% clear and 90% Numix Fade Out Thinner
- Optionally extend the fade-out area within 5 min maximum.
- Stay with the application within the prepared area.

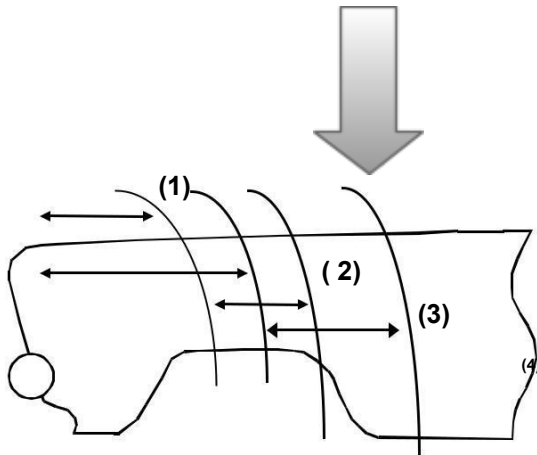

If necessary, balance out the gloss level by polishing with a non silicone containing polishing compound or a non silicone containing final glaze, after complete hardening of the repair.

REMARKS

- Store the paint in proper storage conditions as per the local regulations.
- Keep the paint container in a sealed condition under a shed, away from direct sunlight and extreme temperatures.
- Do not keep paint material near any ignition sources. Do not put back the half or unused material back in the original container, containing the supplied paint to avoid contamination.
- Handle with care. Stir well before use. 48 months @ 30°C, in original sealed container, with proper storage conditions.

NOTE: We warranty the quality of our product and this data sheet represents test results and practical experience obtained under controlled conditions. We reserve the right to change data without prior notice.